



Caledonian



PAS 5308 Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

PAS 5308 Part 1 / Type 3 (Lead Sheath Cables)

PE-OS-Lead-SWA-PVC Stranded Conductor 2P0.5

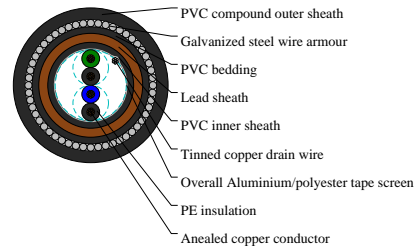

APPLICATIONS

These cables are designed to connect electrical instrumentation and communication systems in and around process plants and similar applications. Generally used to transmit analogue or digital signals in measurement and process control where chemicals may be present. They are well adapted to underground use in industrial applications, in moist areas, where chemical and mechanical protections are needed. The lead sheath brings an enhanced resistance to aromatic hydrocarbons.

CABLE CONSTRUCTION

Conductor: Annealed copper, multistranded (Class 5) to BS EN 60228

Insulation: Thermoplastic PE to BS EN 50290-2-23:2002, grade L/MD or a cross-linked PE to BS EN 50290-2-29

Pairing: Two insulated conductors uniformly twisted together with a lay not exceeding 100mm, Two-pair cables without individual pair screens (quads) shall have four cores laid in quad formation round a central dummy

Binder tape: Non-hygroscopic binder tape of minimum thickness 0.023 mm

Collective screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm²

Inner Sheath: extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51

Lead Sheath: Lead Alloy conforming to BS EN 50307

Bedding: extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51

Armour: Galvanized steel wire armour

Outer sheath: extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51

COLOUR CODE

Insulation: See technical information

Outer Sheath: Generally black

PHYSICAL AND THERMAL PROPERTIES

Temperature range:

above 0°C (fixed installation)

-15°C to +65°C (during operation)

Electrical Properties



Caledonian

PAS 5308 Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Conductor Area Size:0.5 mm²

Conductor Stranding(No.xmm):16x0.2

Conductor resistance(max):39.7 ohm/km

Insulation resistance(min):

Individual conductor:5 Gohm/km

Individual screen:1 Mohm/km

Capacitance unbalance at 1kHz(pair to pair screen):250 pF/250m

Max. Mutual Capacitance @ 1kHz for Non OS or OS cables(except 1 pair and 2 pairs):75 pF/m

Max. Mutual Capacitance @ 1kHz IS/OS cables (include 1 pair and 2 pairs):115 pF/m

Max. L/R Ratio for adjacent cores(Inductance/Resistance):25 µH/ohm

Test voltage:2000 V

Rated voltage:300/500 V

DIMENSION AND PARAMETERS

No. of Pairs	Nominal Cross-sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Bedding Thickness	Nominal Dia. over Bedding	Lead Sheath Thickness	Nominal Inner Sheath Thickness	Nominal Diameter over Inner Sheath	Nominal Diameter over Lead Sheath	Nominal Armour Wire Diameter	Nominal Outer Sheath Thickness	Nominal Diameter over Armour	Nom. Overall Diameter
	mm ²	no./mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
2	0.5	16/0.2	0.6	0.8	10.7	1.1	0.8	6.9	9.1	0.9	1.4	12.5	15.3