



# Caledonian



Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## 12/20(24)KV Power Cables to CENELEC HD620 & C 33-226

XKDT-FT Three Core 12/20KV Copper Conductor Galvanized Steel Flat Wire Armoured  
RF33226-XKDT-FT-12/20KV-3G150SCU

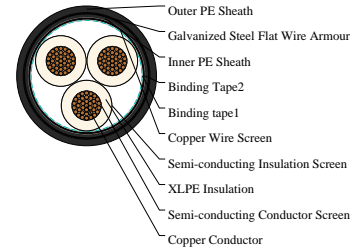

### APPLICATIONS

The cables are power cables for power networks, underground, outdoors and in cable ducting, in particular for installation where fire, smoke emission and toxic fumes create a potential threat.

### STANDARDS

CENELEC HD 620

C 33-226

### CABLE CONSTRUCTION

Conductor: Class 2 stranded plain copper conductor to BS EN 60228:2005(previously BS6360)

Conductor Screen: Semi-conducting material

Insulation: XLPE

Insulation Screen: Semi-conducting material

Metallic Screen: Copper wire screen

Filler: PETP (Polyethylene Terephthalate) fibres

Separator: Binding tape

Inner Sheath: PE

Armour: Galvanized steel flat wire armoured

Outer Sheath: PE

### PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 12xOD

Temperature Range: 0°C to +90°C (during operation); 0°C to +60°C (during installation)

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Nom. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	Ω/km



# Caledonian

## Railway Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)


3 x 150	37/2.25	5.5	1.8	3.5	89.1	12800	0.124
---------	---------	-----	-----	-----	------	-------	-------



Buried in Ground




Laid In Ducts



UV Resistant



Water Resistant



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454