



# Caledonian


## Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

### 450/750V LSZH Single Core Conduit Wires to EME-SP-14-026

RF14026-ES07Z-U(AS)-450/750V-1G120S

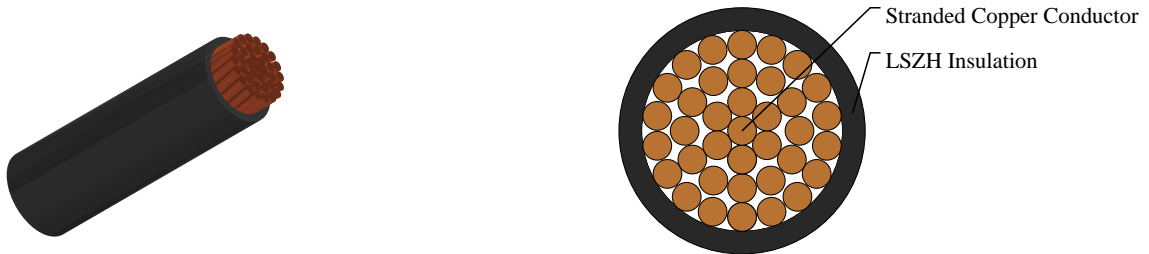

### APPLICATIONS

Single core LSZH conduit wire.

### STANDARDS

EME SP 14 026 (LUL version of BS7211)

UNE 211002

### VOLTAGE RATING

450/750V

### CABLE CONSTRUCTION

Conductors: Stranded plain copper conductors to IEC 60228 class 2 or 5.

Insulation: LSZH.

### PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 8 x OD

Operating Temperatures: -25°C to +85°C (during operation); -10°C to +70°C (during installation)

### DIMENSION AND PARAMETERS

| No. of Cores<br>× Cross-sectional Area | No./Nominal Diameter of Strands | Nominal Insulation Thickness | Nom. Overall Diameter | Approx. Weight | Max. DC Resistance at 20°C |
|--|---------------------------------|------------------------------|-----------------------|----------------|----------------------------|
| No. × mm <sup>2</sup>                  | no./mm                          | mm                           | mm                    | kg/km          | Ω/km                       |
| 1 x 120                                | 37/2.03                         | 1.6                          | 16.6                  | 1203           | 0.153                      |



Fire Retardant  
NF C32-070-2.2(C1)  
IEC60332-3-24/EN50266-2-4



Flame Retardant  
NF C32-070-2.1(C2)  
IEC60332-1-2/EN50265-2-1




Low Corrosivity  
IEC60754-2/EN50267-2-2/3  
NF C32-074/NF C20-453



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/NF C 20-902



Low Toxicity



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454