



# Caledonian


EN 50264 Rolling Stock Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FIREROL Medium Wall Single Core Unsheathed & Fire Resistant

EN 50264-3-1 (FRL-MW-3SU-PH15/30/60)

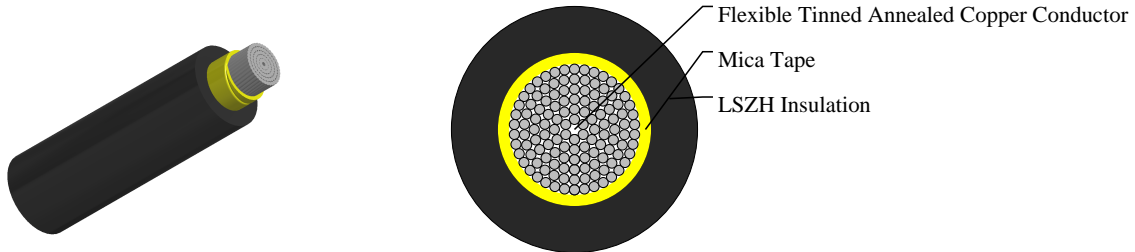

### APPLICATIONS

- Used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor.
- Used in control, auxillary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

### VOLTAGE RATING

1.8/3 kV

### CABLE CONSTRUCTION

Conductor: Flexible tinned annealed copper wires, stranded as per HD 383 (IEC 60228) class 5

Insulation: Mica tape+LSZH elastomeric compound as defined in EN 50264-1 (EI 106 to EI 109)

### MECHANICAL PROPERTIES

Max. Conductor Temperature: 90 °C ( fixed installation )

Min. Permissible Ambient Temperature: -25 °C/-40 °C ( fixed installation )

Bending Radius

Fixed installation:

10 x Overall Diameter (D<12mm);

12 x Overall Diameter (D>12mm)

Flexible installation:

20 x Overall Diameter (D<12mm);

25 x Overall Diameter (D>12mm)

### CHEMICAL AND ENVIRONMENTAL PROPERTIE

|                        |   |
|------------------------|---|
| EN 60684-2             | No fluorine   |
| EN 50305; EN 60811-2-1 | Resistance to mineral oil & fuel oil, acid & alkali |
| EN 50305               | Resistance to ozone                                 |

### FIRE PERFORMANCE FOR ROLLING STOCK APPLICATION

|            |                             |
|------------|-----------------------------|
| EN 50306-2 | Hazard levels HL1, HL2, HL3 |
|------------|-----------------------------|



# Caledonian

EN 50264 Rolling Stock Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

|                |  |
|----------------|--|
| DIN 5510-2     | Protection level 1/2/3/4                         |
| BS 6853        | Interior use 1a, 1b, II; Exterior use 1a, 1b, II |
| NF F 16-101    | F0   |
| EN45545-2      | R15 Interior/ R16 Exterior HL1, HL2, HL3         |
| EN 50200: 2006 | PH15, PH30, PH60                                 |

## FIRE PERFORMANCE IN GENERAL

|   |  |
|---|--|
| EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)                                 | Vertical flame propagation for a single insulated wire or cable  |
| EN 50266-2-4 + EN 50305; IEC 60332-3-24;NF C 32-070 2.2 (C1); VDE 0472 Teil 804   | Vertical flame spread of vertically mounted bunched wires or cables  |
| EN 50268-2; IEC 61034-2; NF C 32-073 ;NF C 20-902; NF F 16 101; VDE 0472 Teil 816 | Low Smoke Emission   |
| EN 50267-2-1; IEC 60754-1; NF C 32-074;NF C 20-454; VDE 0472 Teil 815             | Halogen Free   |
| EN 50267-2-2/3; IEC 60754-2; NF C 32-074;NF C 20-453; VDE 0472 Teil 813           | Low Corrosivity (Acidity & Conductivity)   |
| EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853                                | Low Toxicity   |
| NF F 63 808; BS6853; NF F 16 101  | Smoke Index  |
| IEC60331-21   | The circuit integrity test under fire of cables rated 0.6/1.0kV and below  |
| EN45545-2   | Requirement for fire behavior of materials & components R15/R16  |
| EN50200: 2006   | Resistance to fire of unprotected small cable for use in emergency circuits 5 classifications are defines: PH15, 30, 60, 90 or 120 mins. |

## DIMENSION AND PARAMETERS

| Nominal Cross-sectional Area | Conductor Diameter | Min. Mean Thickness of Insulation | Overall Diameter (min.) | Overall Diameter (max.) | Approx. Weight | Max. Conductor Resistance at 20 °C | Min. Insulation Resistance at 20 °C | Min. Insulation Resistance at 90 °C |
|------------------------------|--------------------|-----------------------------------|-------------------------|-------------------------|----------------|------------------------------------|-------------------------------------|-------------------------------------|
| mm <sup>2</sup>              | mm                 | mm                                | mm                      | mm                      | kg/km          | MΩ × km                            | MΩ × km                             | MΩ × km                             |
| 16                           | 5.0                | 2.0                               | 8.8                     | 10.3                    | 235            | 1.24                               | 9.5                                 | 0.095                               |



# Caledonian


EN 50264 Rolling Stock Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)



Acid & Alkaline Resistant



Cold Resistant



Fire Retardant  
NF C32-070-2,2(C1)  
IEC60332-3-24/EN50266-2-4



Flame Resistant  
EN50200



Flame Retardant  
NF C32-070-2,1(C2)  
IEC60332-1-2/EN50265-2-1



Highly Flexible



Impact Resistant



IRM 902  
Mineral Oil Resistant



IRM 903  
Fuel Oil Resistant



Low Corrosivity  
IEC60754-2/EN50267-2-2/3  
NF C32-074/NF C20-453



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/NF C 20-902




Low Toxicity  
EN 50305; NF X70-100/NF  
F63 808/TM1-04/BS 6853



Ozone Resistant



Resistance To  
Soldering Heat



UV Resistant



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454