



Caledonian


Rolling Stock Cables to French Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

FIREROL Extra-Flexible High Temperature Single Core Screened & Sheathed Cables

NF F 63-827 (FRF-HT-3S-EF)

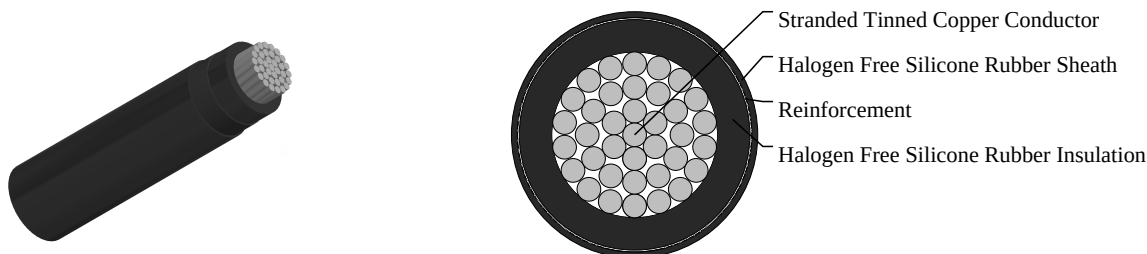

APPLICATIONS

These cables are used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor, suitable for use in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

VOLTAGE RATING

3000V

CABLE CONSTRUCTION

Conductor: Stranded tinned copper wires to IEC 60228 Class 6

Insulation: Halogen free silicone rubber

Reinforcement: Textile braid

Sheath: Halogen free silicone rubber

Electrical Properties

Max. Conductor Temperature: 120 °C/140 °C

Temperature Range: -40 °C~+135 °C

Bending Radius : 3 × Overall Diameter

FIRE PERFORMANCE FOR ROLLING STOCK APPLICATION

NF F 63-827

NF F 16-101

EN45545-2

FIRE PERFORMANCE IN GENERAL

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)	Vertical flame propagation for a single insulated wire or cable
EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804	Vertical flame spread of vertically mounted bunched wires or cables
EN 50268-2; IEC 61034-2; NF C 32-073 ;NF C 20-902; NF F 16 101; VDE 0472 Teil 816	Low Smoke Emission



Caledonian

Rolling Stock Cables to French Standard


www.caledonian-cables.com

marketing@caledonian-cables.com

EN 50267-2-1; IEC 60754-1; NF C 32-074;NF C 20-454; VDE 0472 Teil 815	Halogen Free
EN 50267-2-2/3; IEC 60754-2; NF C 32-074;NF C 20-453; VDE 0472 Teil 813	Low Corrosivity (Acidity & Conductivity)
EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853	Low Toxicity
NF F 63 808; BS6853; NF F 16 101	Smoke Index
EN45545-2	Requirement for fire behavior of materials & components R15/R16

DIMENSION AND PARAMETERS


Nominal Cross-sectional Area	No./Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
mm ²	no./mm	mm	mm	mm	kg/km
150.0	2123/0.30	3.3	22.8	25.0	1800



Abrasion Retardant



Acid & Alkaline Resistant



Cold Resistant



Fire Retardant
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardant
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Highly Flexible



Impact Resistant



IRM 902
Mineral Oil Resistant



IRM 903
Fuel Oil Resistant




Low Corrosivity
IEC60754-2/EN50367-2-2/3
NF C32-074/NF C 20-453



Low Smoke Emission
IEC 61034-2 / EN 50268-2
NF C32-073/NF C 20-902




Low Toxicity
EN 50305; NF X70-100/NF
F63 808/TM1-04/BS 6853




Ozone Resistant



Resistance To
Soldering Heat



UV Resistant



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454