





# Caledonian

Telecommunication cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## Auxiliary Multipair Filled Cables 5KV 37P0.5

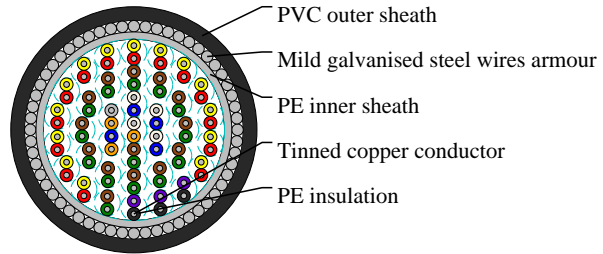

### APPLICATIONS

These control cables are primarily for use with control, indication and alarm equipment for switchgear and similar power apparatus in power stations and substations. Rated for use in areas where the induced voltage does not exceed 5 kV.

### STANDARDS

ENATS 09-6 ISSUE 9

Flame Retardant: IEC 60332-3-24

### VOLTAGE RATING

5KV

### CABLE CONSTRUCTION

Conductors : Solid(Class 1) tinned copper conductors to BS EN 60228.

Insulation : PE insulation to BS7655 .

Pair Identification : See colour code.

Filled : a non-hygroscopic material.

Inner Sheath : PE inner sheath to BS7655.

Armouring : Mild galvanised steel wires to BS EN10257-1.

Outer Sheath : PVC outer sheath to BS7655.

### COLOUR CODE

ENATS 09-6 Issue 9 \* Table 1

### PHYSICAL AND THERMAL PROPERTIES

PROPERTIES FOR CABLE:

Temperature Rating : 70°C maximum conductor operating temperature

Minimum Bending Radius: 10 X O.D.

PROPERTIES FOR OUTER SHEATH:

Amount of halogen acid gas: HCl < 15%

Sunlight Resistance: UL 1581 Section 1200

Temperature Installation: -5°C/50°C

Temperature Operating: -30°C/50°C



# Caledonian

Telecommunication cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## Electrical Properties

ELECTRICAL DATA @ 20°C:

Conductor resistance (Solid / Class 1):36 Ω/km(Max.)

Insulation resistance (Individual conductor):5000 MΩxkm(Min.)

Mutual capacitance 1kHz (Nominal equivalent star):60 nF/km(Max.)

Test voltage:Ums core:5000V(core)

## DIMENSION AND PARAMETERS

No. of Cores	Nominal Cross-sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Diameter Over Inner Sheath (min.)	Nominal Armour Wire Diameter	Nominal Outer Sheath Thickness	Approx. Overall Diameter	Appr. Copper Weight
	mm <sup>2</sup>	mm	mm	mm	mm	mm	mm	kg/km
37	0.5	0.5	1	23.95	1.6	1.9	30.95	1752