



## Caledonian


### NEK606 Water Blocked Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## Fire Resistant Power and Control Cables

### Water Blocked P5 or P5/P12 BFOU 0.6/1KV 2C2.5

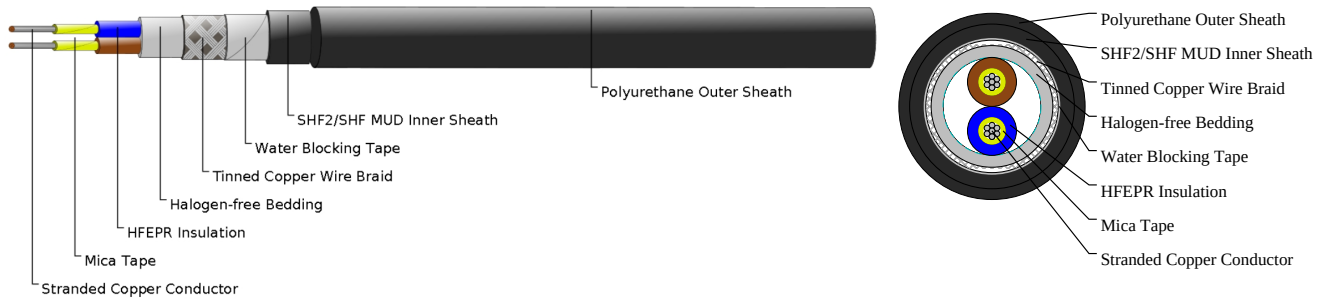

## APPLICATIONS

These cables are partially water blocked, fire resistant, flame retardant, low smoke, halogen free and mud resistant, used for control, power and lighting systems.

## STANDARDS

IEC 60092-353

IEC 60092-360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1,2

IEC 61034-1,2

NEK 606

VG 95218 part 29

IEC 60331-21

## VOLTAGE RATING

0.6/1KV

## CABLE CONSTRUCTION

Conductors: Tinned annealed stranded compacted copper to IEC 60228 class 2.

Insulation: Mica tape + Halogen free EPR/Mica tape + XLPE.

Filler: Water blocking fillers, if required.

Bedding: Halogen free compound, PETP wrapping tape will be applied over the bedding, if required.

Armour: Tinned copper wire braid, PETP wrapping tape will be applied over the braiding, if required.

Water Blocking Elements: Water blocking tape and strings for providing longitudinal water tightness.

Inner Sheath: Halogen free thermosetting compound, SHF2 (for TYPE P5). Halogen free, mud resistant thermosetting compound, SHF MUD (for TYPE P5/P12), coloured black.

Outer Sheath: Polyurethane for providing transversal water tightness, PE is optional, but can not meet low smoke standard.

## PHYSICAL AND THERMAL PROPERTIES



# Caledonian

## NEK606 Water Blocked Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)


Temperature Range: -20°C ~ +90°C

### TECHNICAL CHARACTERISTICS

| Nom. Cross-Section Area | Nom. Conductor Diameter | Maximum Resistance @20°C | Continuous Current Rating @45°C 1 Core | Short Circuit Current 1s |
|-------------------------|-------------------------|--------------------------|----------------------------------------|--------------------------|
| mm <sup>2</sup>         | mm                      | Ohm/km                   | A                                      | A                        |
| 2.5                     | 2.1                     | 7.56                     | 26                                     | 360                      |

### DIMENSION AND PARAMETERS

| No. of Cores × Cross-sectional Area | Nominal Insulation Thickness | Nominal Bedding Thickness | Nominal Inner Sheath Thickness | Nominal Outer Sheath Thickness | Nom. Overall Diameter | Cable Weight |
|-------------------------------------|------------------------------|---------------------------|--------------------------------|--------------------------------|-----------------------|--------------|
| No.×mm <sup>2</sup>                 | mm                           | mm                        | mm                             | mm                             | mm                    | kg/km        |
| 2×2.5                               | 1                            | 1.1                       | 1.3                            | 1                              | 17.1±2                | 378          |



Circuit Integrity  
IEC 60331-21



Flame Retardant  
IEC 60332-1



Halogen Free  
IEC 60754-1



Low Corrosivity  
IEC 60754-2



Low Smoke Emission  
IEC 61034-2



Reduced Fire Propagation  
IEC 60332-3-22