



# Caledonian


## NEK606 Water Blocked Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

### Medium Voltage Power Cables

Water Blocked P4 or P4/P11 RFOU/TFOU 8.7/15KV 1C95

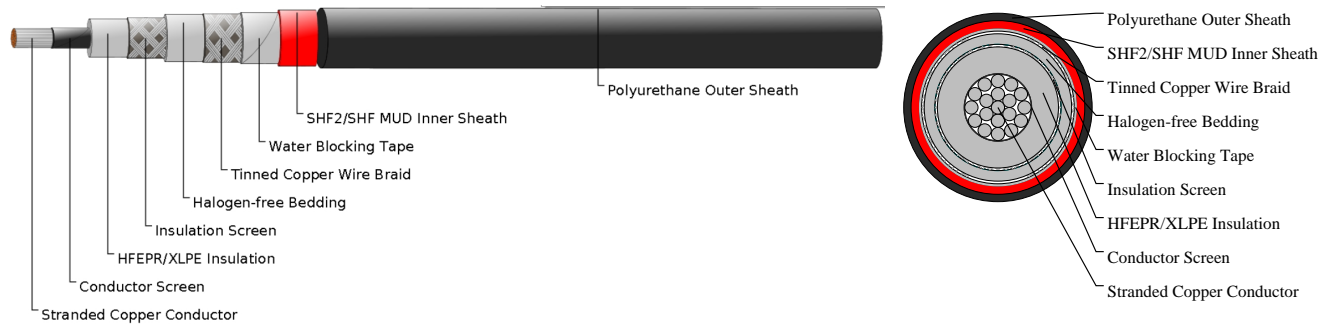

### APPLICATIONS

These cables are partially water blocked, flame retardant, low smoke, halogen free and mud resistant, used for fixed installation for medium voltage power.

### STANDARDS

IEC 60092-353

IEC 60092-360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1,2

IEC 61034-1,2

NEK 606

VG 95218 part 29

### VOLTAGE RATING

8.7/15KV

### CABLE CONSTRUCTION

**Conductors:** Circular tinned annealed stranded copper to IEC 60228 class 2.

**Conductor Screen:** Semi conducting material.

**Insulation:** Halogen-free EPR. XLPE can be offered as an option (for TFOU cable).

**Insulation Screen:** Semi conducting material and tinned copper wire braid.

**Filler:** Water blocking fillers, if required.

**Bedding:** Halogen free compound, PETP wrapping tape will be applied over the bedding, if required.

**Armour:** Tinned copper wire braid, PETP wrapping tape will be applied over the braiding, if required.

**Water Blocking Elements:** Water blocking tape and strings for providing longitudinal water tightness.

**Inner Sheath:** Halogen free thermosetting compound, SHF2 (for TYPE P4), or halogen free mud resistant thermosetting compound, SHF MUD (for TYPE P4/P11), coloured red.

**Outer Sheath:** Polyurethane for providing transversal water tightness, PE is optional, but can not meet low smoke standard.



# Caledonian

## NEK606 Water Blocked Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

### PHYSICAL AND THERMAL PROPERTIES

Bending Radius: 15×OD (during installation); 9×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

### TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum Resistance @20°C	Continuous Current Rating @45°C 1 Core	Short Circuit Current 1s
mm <sup>2</sup>	mm	Ohm/km	A	A
95	12.2	0.195	293	13590

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Bedding Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Nom. Overall Diameter	Cable Weight
No.×mm <sup>2</sup>	mm	mm	mm	mm	mm	kg/km
1×95	4.5	1.8	1.4	1.4	37.2±2	2363



Flame Retardant  
IEC 60332-1



Zero  
Halogen Free  
IEC 60754-1



Low Corrosivity  
IEC 60754-2



Low Smoke Emission  
IEC 61034-2



Reduced Fire Propagation  
IEC 60332-3-22