





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## AEXHSF 1C15

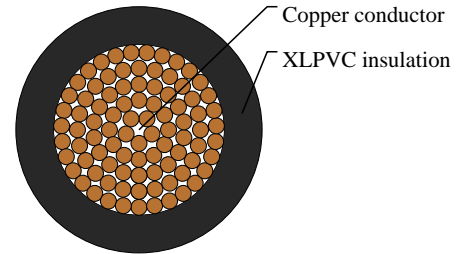

### APPLICATIONS

This XLPE insulated single-core cable is used in EPS(Electric power steering), Starter motor for automobiles.

### STANDARDS

HKMC ES 91110-05

### CABLE CONSTRUCTION

Conductor: Tin coated annealed copper

Insulation: Cross-linked Polyethylene (XLPE)

Standard Compliance: HKMC ES 91110-05

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -45°C to +150 °C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x15	588/0.18	5	1.1	7.2	7.5	160	1.32