





# Caledonian

## Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### AVSS-BS 2C0.3

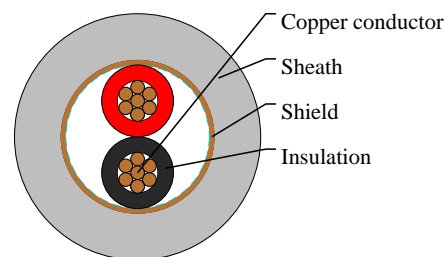

### APPLICATIONS

This PVC insulated cable is used in low electrostatic capacitance in automobiles(vehicles). Thinner insulation than AVS type. Suitable for the consideration of the shielding characteristic.

### STANDARDS

JASO D611; ES SPEC

### CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: PVC

Shield: Tin coated annealed copper

Sheath: PVC

Standard Compliance: JASO D611; ES SPEC

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +120 °C

### DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
2/0.3	7/0.26	0.8	0.3	4.6	4.8	28	50.2