





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

AVSS-BS 2C0.85

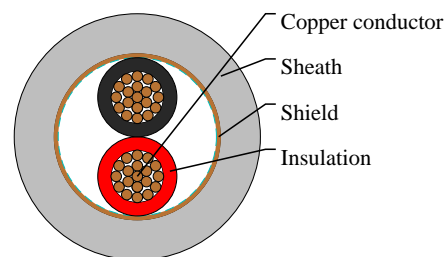

APPLICATIONS

This PVC insulated cable is used in low electrostatic capacitance in automobiles(vehicles). Thinner insulation than AVS type. Suitable for the consideration of the shielding characteristic.

STANDARDS

JASO D611; ES SPEC

CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: PVC

Shield: Tin coated annealed copper

Sheath: PVC

Standard Compliance: JASO D611; ES SPEC

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +120 °C

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
2/0.85	19/0.24	1.2	0.3	5.4	5.6	42	21.7