





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## AVUHSF 1C40

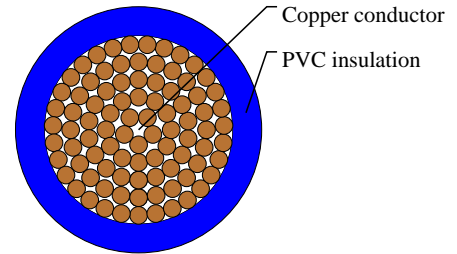

### APPLICATIONS

This PVC insulated single-core cable is used in low voltage circuits in automobiles(Battery Cable)

### STANDARDS

ES SPEC

### CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: Polyvinyl Chloride(PVC)

Standard Compliance: ES SPEC

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature:-40 °C to +135°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x40	1558/0.18	9.2	1.4	12	12.4	430	0.41