



# Caledonian



Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## CAVS 1C0.3

CAVS

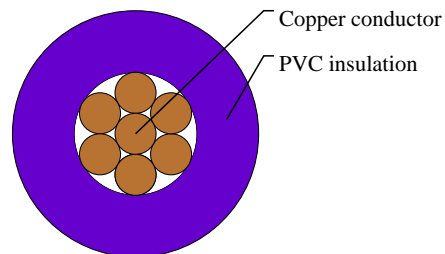

## APPLICATIONS

This PVC insulated single-core low tension cable is used for automotive wiring.

## STANDARDS

JASO D 611-94

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 according to JIS C 3102

Insulation: PVC

Standard Compliance: JASO D 611-94

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +80 °C

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x0.3	7/0.26	0.7	0.35	1.4	1.5	3	50.2