





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## CAVUS 1C0.5

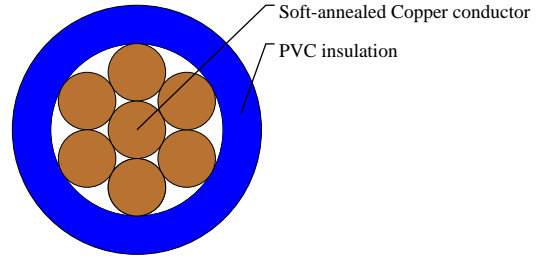

## APPLICATIONS

This PVC insulated single-core cable is used for automotive wiring.

## STANDARDS

JASO D 611-94

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 according to JIS C 3102

Insulation: PVC

Standard Compliance: JASO D 611-94

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +80 °C

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x0.5	7/0.32	0.9	0.2	1.3	1.4	6	32.7