





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## FL4G

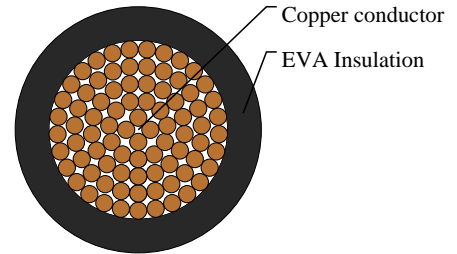

### APPLICATIONS

This EVA insulated single-core cable is used for cable harnesses.

### STANDARDS

ISO 6722 Class D

### CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN13602

Insulation: Cross-linked ethylene/vinylacetate insulation(EVA)

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to 140°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Approx. Overall Diameter	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	kg/km	MΩ × km
1×6.00	84/0.31	3.40	0.64	5.0	68	3.23