





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLALRY

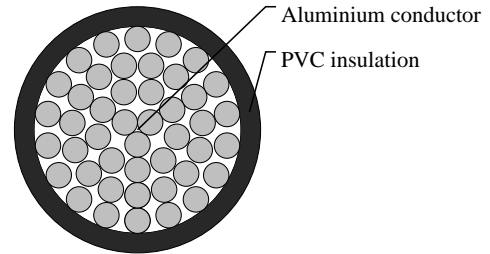

APPLICATIONS

This PVC insulated automotive cable is designed for telecommunication overhead contract line and electronics.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor:

Aluminium 99.7% $\geq 1.25 \text{ mm}^2$

Aluminium alloy $< 1.25 \text{ mm}^2$

Insulation: PVC

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to $+105^\circ\text{C}$

Cables with cross-sections $> 10 \text{ mm}^2$ can be used as battery cables

Considerable weight savings compared to copper

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1x6.0	45/0.42	3.4	0.32	4.0	4.3	23	5.23