





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLR14Y

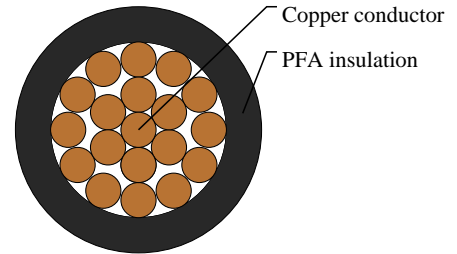

APPLICATIONS

This PFA insulated automotive cable is used for cable harnesses, cable with excellent resistance against chemicals, can be used as an alternative to PTFE.

STANDARDS

ISO 6722 Class H

CABLE CONSTRUCTION

Conductor: Sliver or Nickel plated copper

Insulation: PFA

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -80°C to +260°C

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1 × 0.75	19/0.22	1.2	0.24	1.7	1.90	10	25.4