





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## FLR9Y-A

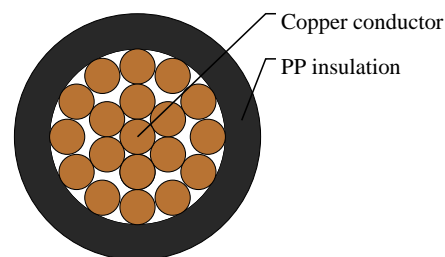

## APPLICATIONS

This PP insulated single-core cable is used for cable harnesses, Halogen-free.

## STANDARDS

ISO 6722 Class C

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN 13602

Insulation: Polypropylene insulation (PP)

Standard: ISO 6722 Class C

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +125°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	mohm/m
1 × 0.75	19/0.23	1.20	0.24	1.70	1.90	9.0	25.4