





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLRYK

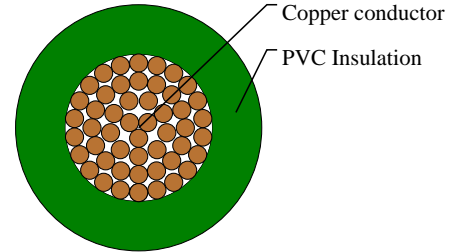

APPLICATIONS

This PVC insulated low-tension automotive cable is used in motorcycles and other motor vehicles for starting ,charging,lighting,signal and instrument panel circuits.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare according to DIN EN 13602

Insulation:PVC insulation(Cold resistant)

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -50°C to +105°C

MECHANICAL PROPERTIES

Cold bending test according to ISO 6722 at -50 °C.

Short-term and long-term ageing according to ISO 6722, Class B.

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No.×mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1×2.5	50/0.26	2.1	0.70	3.5	3.7	33	7.6