





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FLRYW-A

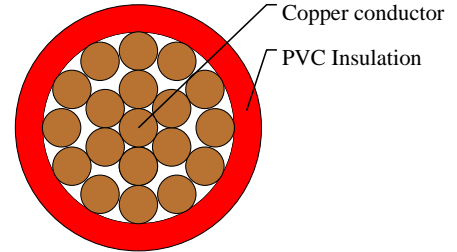

## APPLICATIONS

This PVC insulated single-core cable is used as low-tension electric wire for automobiles.

## STANDARDS

ISO 6722 Class C

## CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare according to DIN EN 13602

Insulation:PVC

## PHYSICAL AND THERMAL PROPERTIES

Heat resistant cable

Suitable for application inside the engine compartment

Operating temperature: -50°C to +125°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1×1.50	19/0.32	1.70	0.24	2.2	2.4	16	12.7