





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLRYWd

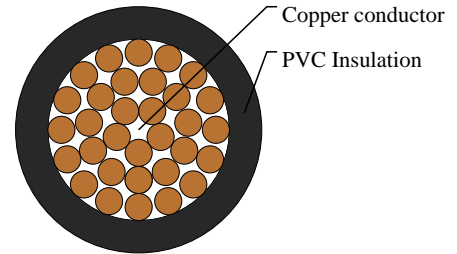

APPLICATIONS

This PVC insulated single-core cable is used for vehicle constructions.

STANDARDS

ISO 6722 CLASS B

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN 13602

Insulation: PVC

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to $+105^{\circ}\text{C}$

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1×1.0	32/0.21	1.35	0.24	1.9	2.1	11.0	18.5