





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLRYY

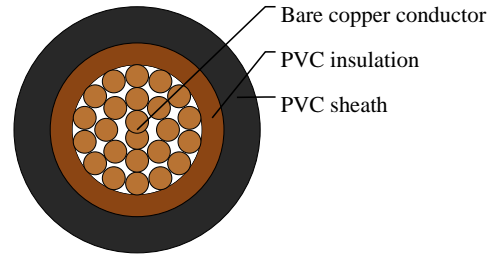

APPLICATIONS

This PVC insulated, PVC sheathed cable is used for low voltage electrical installations in vehicles.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN13602

Insulation: PVC

Sheath: PVC

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +105 °C

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Sheath Thickness	Diameter Of Core	Overall Diameter (max.)	Electrical Resistance at 20°C (max.)
No. × mm ²	no./mm	mm	mm	mm	mm	MΩ/m
1 × 0.75	24/0.21	0.24	0.4	1.9	2.8	24.7