





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLRYY

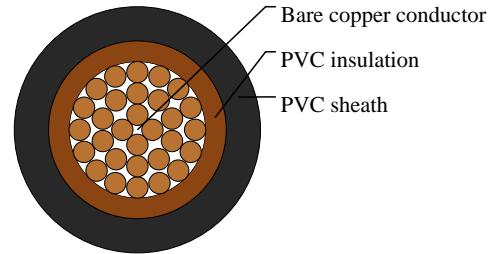

APPLICATIONS

This PVC insulated, PVC sheathed cable is used for low voltage electrical installations in vehicles.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN13602

Insulation: PVC

Sheath: PVC

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +105 °C

DIMENSION AND PARAMETERS

| No. of Cores × Cross-sectional Area | No. and Dia. of Wires | Nominal Insulation Thickness | Nominal Sheath Thickness | Diameter Of Core | Overall Diameter (max.) | Electrical Resistance at 20°C (max.) |
|--|--------------------------|------------------------------------|--------------------------------|---------------------|-------------------------------|--|
| No. × mm ² | no./mm | mm | mm | mm | mm | MΩ/m |
| 1x1.5 | 30/0.26 | 0.24 | 0.4 | 2.4 | 3.3 | 12.7 |