





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## FLRYY

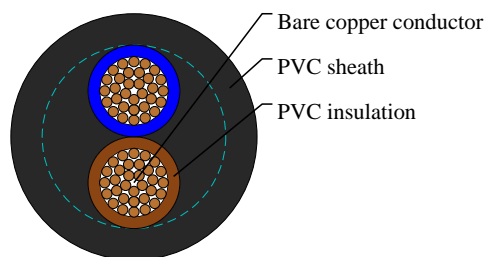

## APPLICATIONS

This PVC insulated, PVC sheathed cable is used for low voltage electrical installations in vehicles.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN13602

Insulation: PVC

Sheath: PVC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +105 °C

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Sheath Thickness	Diameter Of Core	Overall Diameter (max.)	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	MΩ/m
2x1.0	32/0.21	0.24	0.6	2.1	5.5	18.5