





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FLRYY

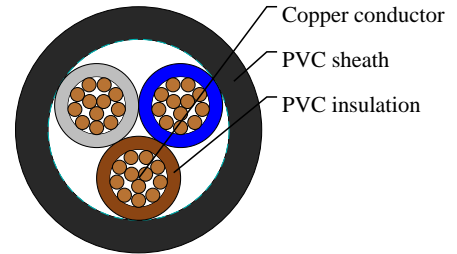

## APPLICATIONS

This PVC insulated, PVC sheathed low tension multi-cores cable is used for automobiles, motorcycles and other motor vehicles.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN13602

Insulation: PVC

Sheath: PVC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +105°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Sheath Thickness	Diameter Of Core	Overall Diameter (max.)	Max. Conductor Resistance at 20 °C
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	MΩ × km
3x0.35	12/0.21	0.2	0.5	1.3	3.9	52.0