





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FLYK

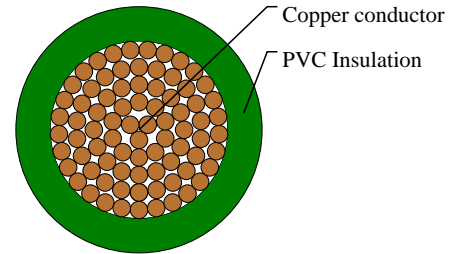

## APPLICATIONS

This PVC insulated automotive cable is used for cars, trucks and other vehicles.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare according to DIN EN 13602

Insulation:PVC insulation(Cold resistant)

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -50°C to +105°C

## MECHANICAL PROPERTIES

Cold bending test according to ISO 6722 at -50 °C.

Short-term and long-term ageing according to ISO 6722, Class B.

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1×10.0	455/0.16	5.2	1.0	6.7	7.3	124	1.85