





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLYK

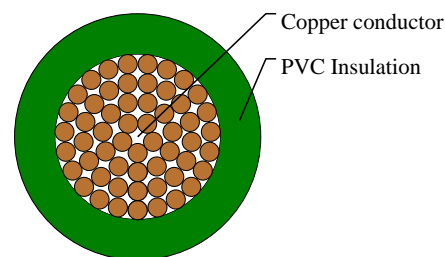

APPLICATIONS

This PVC insulated automotive cable is used for cars, trucks and other vehicles.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN 13602

Insulation: PVC insulation (Cold resistant)

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -50°C to $+105^{\circ}\text{C}$

MECHANICAL PROPERTIES

Cold bending test according to ISO 6722 at -50°C .

Short-term and long-term ageing according to ISO 6722, Class B.

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20°C
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1 × 4.0	196/0.16	3.3	0.8	4.5	4.9	53	4.71