





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLYOY/FLYKOY

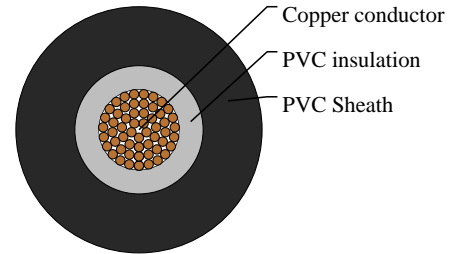

APPLICATIONS

This PVC insulated low-tension automotive cable is used in motorcycles and other motor vehicles for starting ,charging,lighting,signal and instrument panel circuits.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare according to DIN EN 13602

Insulation:PVC

Sheath:PVC, lead free

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +105°C

Flame retardant, extra flexibility, cold resistance

Flexible conductors with PVC thick wall insulation with increased mechanical strength

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./ Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. ×mm ²	no./mm	mm	mm	mm	mm	mm	kg/km	MΩ × km
1x4	56/0.31	2.75	0.8	2.0	8.0	8.4	123	4.7