





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## FLYOY/FLYKOY

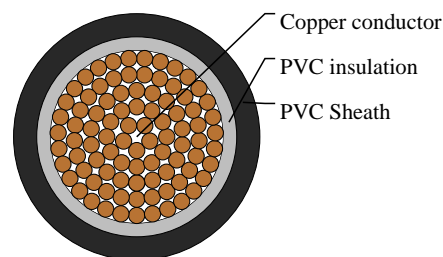

## APPLICATIONS

This PVC insulated low-tension automotive cable is used in motorcycles and other motor vehicles for starting ,charging,lighting,signal and instrument panel circuits.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare according to DIN EN 13602

Insulation:PVC

Sheath:PVC, lead free

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Flame retardant, extra flexibility, cold resistance

Flexible conductors with PVC thick wall insulation with increased mechanical strength

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./ Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. ×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	mm	kg/km	MΩ × km
1x50	396/0.41	10.5	0.8	1.4	14.5	15.1	587	0.368