





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

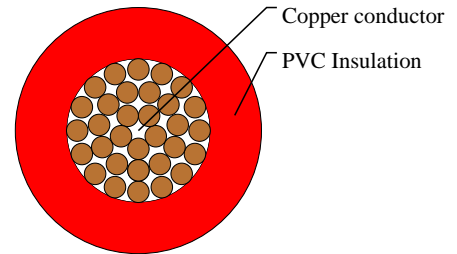

APPLICATIONS

This PVC insulated single-core wire is used for automobiles, motorcycles and other motor vehicles. It has good heat resistance.

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN 13602

Insulation: PVC

Standard Compliance: ISO 6722 Class C

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to 125°C

DIMENSION AND PARAMETERS

| No. of Cores × Cross-sectional Area | No. and Dia. of Wires | Diameter of Conductor (max.) | Nominal Insulation Thickness | Overall Diameter (min.) | Overall Diameter (max.) | Approx. Weight | Max. Conductor Resistance at 20°C |
|---|--------------------------|------------------------------------|------------------------------------|-------------------------------|-------------------------------|-------------------|--|
| No. × mm ² | no./mm | mm | mm | mm | mm | kg/km | MΩ × km |
| 1×1.0 | 32/0.20 | 1.35 | 0.48 | 2.40 | 2.70 | 15 | 18.50 |