


# Caledonian

Automotive Cables www.caledonian-cables.com

marketing@caledonian-cables.com

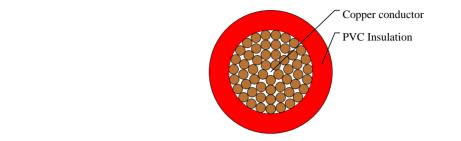

## **APPLICATIONS**

This PVC insulated single-core wire is used for automobiles, motorcycles and other motor vehicles. It has good heat resistance.

### CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN 13602 Insulation: PVC Standard Compliance: ISO 6722 Class C

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to 125°C

### DIMENSION AND PARAMETERS

	No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
	No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	$M\Omega \times km$
ĺ	1×4.0	56/0.31	2.75	0.64	4.00	4.40	48	4.71