





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

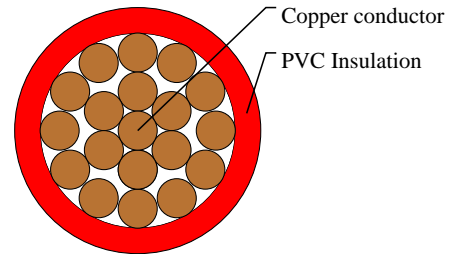

APPLICATIONS

This PVC insulated single-core wire is used for automobiles, motorcycles and other motor vehicles. It has good heat resistance.

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN 13602

Insulation: PVC

Standard Compliance: ISO 6722 Class C

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to 125°C

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1 × 50.0	396/0.40	9.20	1.20	13.20	13.50	547	0.30