





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FLYWK&FLRYWK

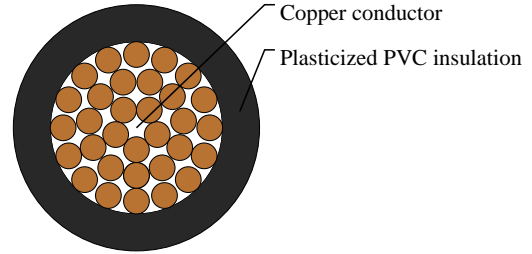

## APPLICATIONS

This PVC insulated low-tension automotive cable is used in motorcycles and other motor vehicles for starting ,charging,lighting,signal and instrument panel circuits.

## STANDARDS

ISO 6722 Class D

## CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare according to DIN EN 13602

Insulation::Plasticized PVC (heat and cold resistant)

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -50°C to +105°C

Cold bending test according to ISO 6722 at -50 °C.

Short-term and long-term ageing according to ISO 6722, Class B.

Flexible conductors with PVC Thin wall insulation with increased mechanical strength

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1x1.0	32/0.20	1.4	0.3	1.8	2.1	57	18.5