





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

FLYY

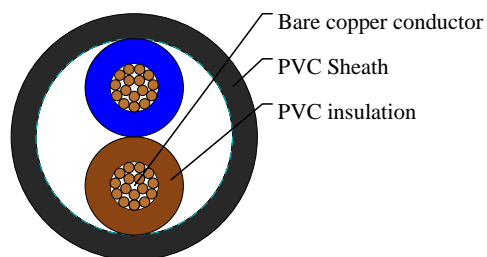

## APPLICATIONS

This PVC insulated, PVC sheathed low tension multi-cores cable is used for automobiles, motorcycles and other motor vehicles.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN13602

Insulation: PVC

Sheath: PVC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

## DIMENSION AND PARAMETERS

No. of Cores $\times$ Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Nominal Sheath Thickness	Diameter Of Core	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at $20^{\circ}\text{C}$
No. $\times$ mm <sup>2</sup>	no./mm	mm	mm	mm	mm	mm	mm	kg/km	M $\Omega \times$ km
2 $\times$ 0.5	16/0.21	1.00	0.60	0.50	1.75	4.30	4.70	31	37.10