





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLYZ

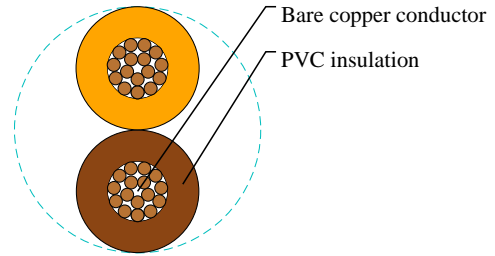

APPLICATIONS

This PVC insulated multi-cores cable is used in internal wiring in automobile where high flexibility, thermo and mechanical strength are required

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN13602

Insulation: Plasticized (PVC)

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +105 °C

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Diameter Of Core	Approx. Overall Diameter	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
2x0.50	16/0.21	1.0	0.5	2.1	4.1x2.1	20	37.1