





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FLYZ

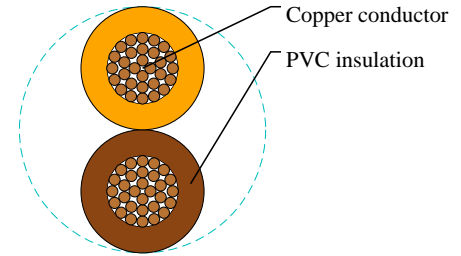

### APPLICATIONS

This PVC insulated multi-cores cable is used in internal wiring in automobile where high flexibility, thermo and mechanical strength are required

### STANDARDS

ISO 6722 Class B

### CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN13602

Insulation: Plasticized (PVC)

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +105 °C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Diameter Of Core	Approx. Overall Diameter	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
2x1.5	48/0.26	1.7	0.6	2.8	5.6x2.8	39	12.7