





# Caledonian

## Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### HAEXF 1C0.75

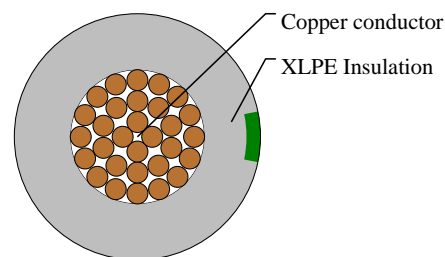

### APPLICATIONS

This XLPE insulated single-core cable is used in low-tension electric circuits for automobiles; especially used for circuits requiring heat resistance and cold resistance.

### STANDARDS

JASO D608

### CABLE CONSTRUCTION

Conductor: Tinned stranded copper

Insulation: XLPE

Standard Compliance: JASO D608

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +150°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x0.75	30/0.18	1.2	0.5	2.2	2.4	21	24.4