





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## HAEXF 1C2.5

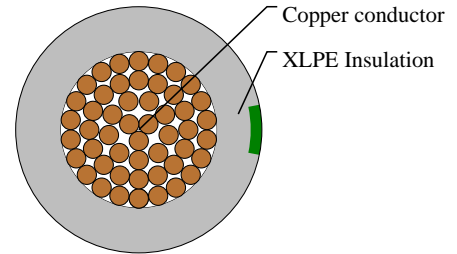

## APPLICATIONS

This XLPE insulated single-core cable is used in low-tension electric circuits for automobiles; especially used for circuits requiring heat resistance and cold resistance.

## STANDARDS

JASO D608

## CABLE CONSTRUCTION

Conductor: Tinned stranded copper

Insulation: XLPE

Standard Compliance: JASO D608

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +150°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1×2.5	50/0.25	2.1	0.6	3.4	3.7	44	7.9