





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## HFSSF-T3 1C1.25

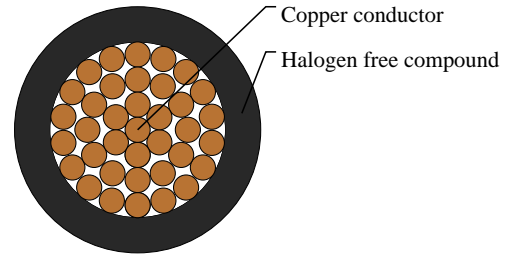

### APPLICATIONS

This halogen free compound insulated single-core cable is used in low voltage circuits in automobiles(Vehicles).

### STANDARDS

ES SPEC

### CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: Halogen free compound

Standard Compliance: ES SPEC

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40 °C to +135°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No. ×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x1.25	37/0.21	1.5	0.3	2.1	2.2	14.3	14.6