





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## AV-V 1C30

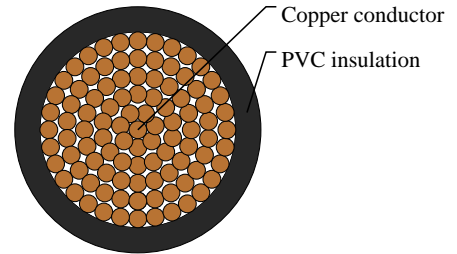

### APPLICATIONS

This PVC insulated single-core cable is used in low voltage circuits in automobiles (Battery Cables).

### STANDARDS

HMC ES 91110-05

### CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: Lead free PVC

Standard Compliance: HMC ES 91110-05

### PHYSICAL AND THERMAL PROPERTIES

Operating temperature:  $-40\text{ }^{\circ}\text{C}$  to  $+80\text{ }^{\circ}\text{C}$

Rated temperature:  $80\text{ }^{\circ}\text{C}$

Rated voltage up to 60V

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at $20\text{ }^{\circ}\text{C}$ (max.)
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x30	361/0.32	7.8	1	9.8	10.3	12	0.63