





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FL2G

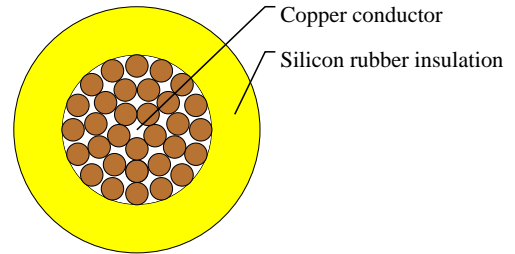

APPLICATIONS

This silicon rubber insulated single core cable is used in battery lead-wire for automobiles.

STANDARDS

ISO 6722 Class F

CABLE CONSTRUCTION

Conductor:Cu-ETP1 bare or tinned according to DIN EN 13602

Insulation:Silicon rubber

Standard:ISO 6722 Class F

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +200°C

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1X1.0	32/0.21	1.5	0.48	2.4	2.7	13.5	18.5