





# Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

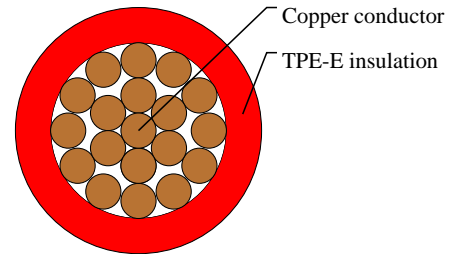

## APPLICATIONS

This TPE-E insulated single-core cable is used for cable harnesses.

## STANDARDS

ISO 6722 Class D

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to DIN EN 13602

Insulation: TPE-E

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +150°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No. × mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1X0.75	19/0.23	1.20	0.24	1.7	1.9	9.0	25.4