



Caledonian



Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Enhanced Category 5 Cables

Cat5e F/UTP

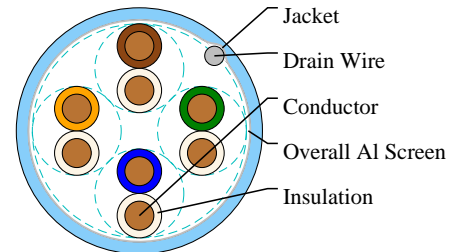

APPLICATIONS

10Base-T, 100Base-T4, 100Base-TX, 100Base-VG-ANYLAN, 155Mbps ATM, 622Mbps ATM, 1000Base-T

PRODUCT DESCRIPTION

Product Highlights:

Provide excellent bandwidth beyond 100 MHz

Meet the strict flame retardancy and environmental requirements in Europe and US

Different jacket materials available for choice

Guaranteed ACR Value > 0 dB @ 200 MHz

Special purpose cables can be offered according to customer request

Different jacket color options available for choice

STANDARDS

ISO/IEC 11801

ANSI/TIA/EIA-568-B

APPROVALS

E222756

CABLE CONSTRUCTION

Conductor: 24AWG Solid Plain Copper

Insulation: PE

Screen: Overall Aluminum Tape Screen

Drain Wire: 1/0.5 mm

Jacket: PVC/LSZH

PHYSICAL AND THERMAL PROPERTIES

Working Frequency: 1-100 MHz

Technical Parameters:

Characteristic Impedance: $100 \pm 15 \Omega$ (1-100MHz)

Nominal Velocity of Propagation(NVP): CMX, CM, CMR,LSZH 69%; CMP 72%

Maximum Mutual Capacitance: 5.6nF/100m



Caledonian

Data Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Maximum Capacitance Unbalance: 330pF/100m

Maximum DC Resistance: 9.38Ω/100m

Maximum Resistance Unbalance: 5%

Maximum Propagation Delay Skew: 30ns/100m

Maximum Propagation Delay: 536ns/100m@100MHz

Minimum Bending radius: 10 x Overall Diameter

Voltage Rating: 80V rms

Maximum Pulling Load: 80N

Working Temperature: -5°C ~+50°C

Storage Temperature: -20°C ~+60°C

Flame Retardancy: UL 1581 (CM Jacket); UL 1666 (CMR Jacket); UL 910 (CMP Jacket); IEC 60332-1(FRPVC & LSZH Jacket); IEC 60332-1 and IEC 60332-3C (LSFROH Jacket)

DIMENSION AND PARAMETERS

Cable Construction	No. of Pairs	Conductor Diameter	Nominal Diameter over Insulation	Approx. Overall Diameter
		mm	mm	mm
F/UTP	4	0.53	1	6.3