



Caledonian

FIREGUARD Flame Retardant Power & Control Cables



www.caledonian-cables.co.uk

sales@caledonian-cables.co.uk

600/1000V PVC Insulated, Non-sheathed Flexible Cables (Single Core)

FGD100 1V-K (CU/PVC 600/1000V Class 5)

600/1000V

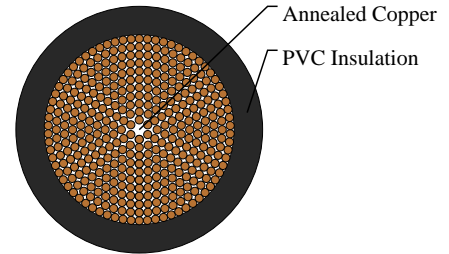

APPLICATIONS

The cables are intended for use in the wiring of switch, control, metering, relay and instrument panels of power switchgear, and for such purposes as internal connections in rectifier equipment and its motor starters and controllers. This product type is TUV approved.

STANDARDS

Basic design to BS 6231: 2006

APPROVALS

TUV Certification (Z1 18 01 98200 016)

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	BS EN 60332-1-2
--	-----------------

CABLE CONSTRUCTION

Conductor: Annealed copper conductor, class 5 according to BS EN 60228.

Insulation: PVC Type TI 1 according to BS EN 50363-3 for cable type BK, and type TI 3 according to BS EN 50363-3 for cable type CK

COLOUR CODE

Black, Blue, Brown, Red, White, Grey, Violet, Pink, Green and Yellow. Other colours can be offered upon request.

PHYSICAL AND THERMAL PROPERTIES

Maximum temperature range during operation (PVC): 70°C (TYPE BK): 90°C (TYPE CK)

Maximum short circuit temperature (5 Seconds): 160°C

Minimum bending radius: 6 x overall diameter

DIMENSION AND PARAMETERS



Caledonian

FIREGUARD Flame Retardant Power & Control Cables

www.caledonian-cables.co.uk

sales@caledonian-cables.co.uk

No. of Cores × Cross-sectional Area	Conductor Class	Nominal Insulation Thickness	Overall Diameter (max.)	Approx. Weight
No. × mm ²		mm	mm	kg/km
1 × 50	5	1.4	15.4	580



Rated voltage



BS 6231



Flame Retardancy
BS/EN/IEC 60332-1-2