





# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

H05BN4-F

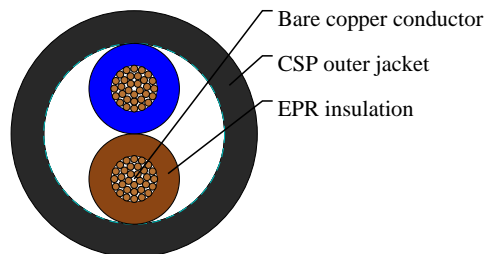

## APPLICATIONS

These EPR (ethylen-propylen rubber) insulated and CSP (chlorosulphonated polyethylene rubber or similar) sheathed electric cables can be used either in dry, humid or wet places or in contact with oil or grease, in weather conditions and under weak mechanical stress, for example for power supply to small appliances in industrial plants, machine shops, heating plates, portable lamps, farming equipment etc. They are also suitable for caravans and camping equipment... The maximum conductor temperature in normal use: 90°C. While high temperature use, skin contact must be avoided.

## STANDARDS

CEI 20-19/12

CEI 20-35 (EN 60332-1)

BS6500

BS7919

VDE 0282 Part-12

IEC 60245-4

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- EPR(Ethylene Propylene Rubber) rubber EI7 insulation
- Color code VDE-0293-308
- CSP(Chlorosulphonated Polyethylene) outer jacket EM7

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308

2 cores - Brown + Blue

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts



# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Flexing bending radius:  $6.0 \times \varnothing$
- Fixed bending radius:  $4.0 \times \varnothing$
- Temperature range:  $-20^{\circ}\text{C}$  to  $+90^{\circ}\text{C}$
- Maximum short circuit temperature:  $+250^{\circ}\text{C}$
- Flame retardant: IEC 60332.1
- Insulation resistance:  $20\text{ M}\Omega \times \text{km}$

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	mm	kg/km	kg/km
2 x 1	17(32/32)	0.6	0.9	6.6	19	65