




# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H05RR-F

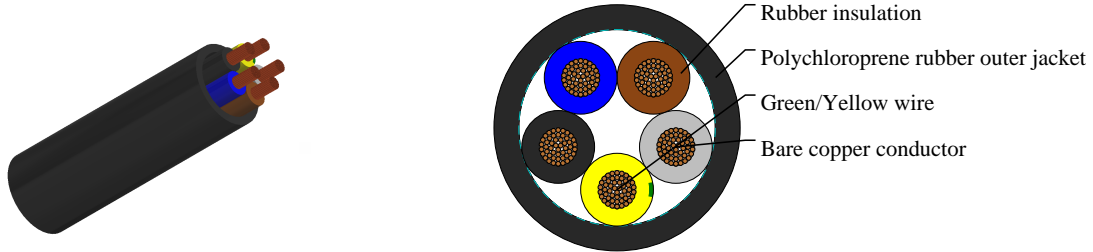

## APPLICATIONS

These cables are flexible rubber insulated; rubber jacketed harmonized cord, recommended for use in equipment, which is subject to light and medium stresses in both dry and damp environments. For use with electronics and electrical equipment such as appliances, small hand tools and office equipment They can be found in flat irons, soldering irons, kitchen aids, toasters, stoves and in connections with light commercial electric tools. Also suitable for fixed installation in furniture, decorative coverings, wall partitions and prefabricated building parts. Max operating voltage in single or three phase system is  $U_0/U$  300/500 volts. In a direct current system max operating voltage is  $U_0/U$  413/825 volts. Outdoor use is permitted only for a short time. They are ozone resistant, oil & fat resistant.

## STANDARDS

CEI 20-19/4 / 20-35 (EN60332-1)

IEC 60245-4

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber core insulation EI4 to VDE-0282 Part-1
- Color code VDE-0293-308 and HD 186
- Green-yellow grounding, 3 conductors and above
- Polychloroprene rubber (neoprene) jacket EM3

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE-0293-308 and HD 186

5 cores (G) - Green-Yellow + Blue + Brown + Black + Grey

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius:  $8 \times \varnothing$



# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Fixed bending radius:  $6 \times \varnothing$
- Temperature range:  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$
- Short circuit temperature:  $+200^{\circ}\text{C}$
- Flame retardant: IEC 60332.1
- Insulation resistance:  $20\text{ M}\Omega \times \text{km}$

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	mm	mm	kg/km	kg/km
5 x 2.5	14(50/30)	0.9	1.3	11.9	15.3	120.0	285