





# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H07V-R

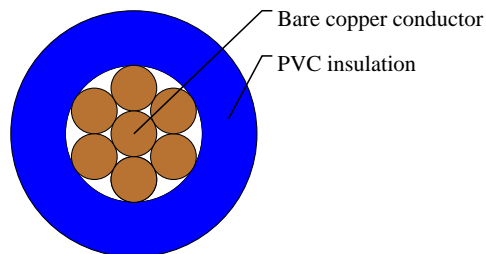

## APPLICATIONS

These cables are preferably for installation indoors, in cable ducts and in industrial plants or switching stations, under ground installation. Can be used in switchboards and distributor boards or where a thicker strand of multi-wire is required. Found in electronic and electrical equipment and switchgear cabinets designed for export to a European country and for MRO replacement of European made equipment wire.

## STANDARDS

CEI 20-20/3

CEI 20-35 (EN60332-1)

CEI 20-52

## VOLTAGE RATING

450/750V

## CABLE CONSTRUCTION

- Bare copper solid/strands conductor
- Strands to VDE-0295 Class-2, IEC 60228 CI-2
- Special PVC TI1 core insulation
- Cores to VDE-0293 colors on chart

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500 volts
- Flexing bending radius:  $15 \times \varnothing$
- Static bending radius:  $15 \times \varnothing$
- Flexing temperature:  $-5^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- Static temperature:  $-30^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$
- Short circuit temperature:  $+160^{\circ}\text{C}$
- Flame retardant: IEC 60332.1



# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Insulation resistance: 10 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	kg/km	kg/km
1 x 2.5	14(7/22)	0.8	3.6	24	35