





# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H07V2-K

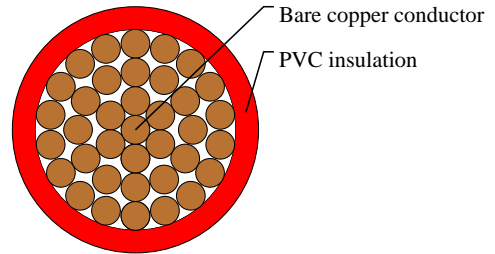

## APPLICATIONS

These special heat-resistant flexible single-conductor hook-up wires are ideal for use in power current installation, switch cabinets, motors and transformers which are subject to direct contact with high temperature (e.g. varnishing machines and drying towers etc.). These are also suitable for inside wiring of electrical equipments such as lighting and heating apparatus.

## STANDARDS

CEI 20-20

CEI 20-52

HD 21.7

## VOLTAGE RATING

450/750V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5, BS 6360 cl. 5 and HD 383
- Special heat resistant PVC TI3 core insulation to DIN VDE 0281 part 7
- Cores to VDE-0293 colors

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293 colors

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius: 10-15 x Ø
- Static bending radius: 10-15 x Ø
- Flexing temperature: +5° C to +90° C
- Static temperature: -10° C to +105° C
- Short circuit temperature: +160° C
- Flame retardant: IEC 60332.1



# Caledonian

Industrial Cables (Italian Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Insulation resistance: 20 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	kg/km	kg/km
1 x 120	4/0(614/24)	1.6	20.2	1115	1235