





Caledonian

Industrial Cables (Portuguese Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

H1VV-R

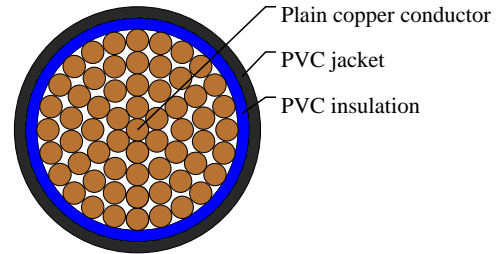

APPLICATIONS

These cables are used for electricity supply in low voltage installation system, They are suitable for installation in indoors and outdoors, in cable ducts, underground, in power and switching stations, local energy distributions, industrial plants, where there is no risk of mechanical damage.

STANDARDS

IEC 60502-1

VOLTAGE RATING

600/1000V

CABLE CONSTRUCTION

- Stranded copper conductor, class 2 to NP 2363
- PVC insulation
- Flexible PVC outer jacket

COLOUR CODE

Insulation Colour Code

Color coded to HD 308

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 3500 volts
- Flexing bending radius: $15 \times \varnothing$
- Static bending radius: $12 \times \varnothing$
- Flexing temperature: -5°C to $+50^{\circ} \text{C}$
- Fixed installation temperature: -40°C to $+70^{\circ} \text{C}$
- Flame retardant: IEC 60332-1, EN 50265-2-1
- Insulation resistance: $100 \text{ M}\Omega \times \text{km}$

DIMENSION AND PARAMETERS

No. of Cores \times Cross-sectional Area	Approx. Overall Diameter	Approx. Weight
No. \times mm ²	mm	kg/km



Caledonian

Industrial Cables (Portuguese Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

1 x 500	37	5140
---------	----	------