





# Caledonian

Industrial Cables (Portuguese Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H1VV-U

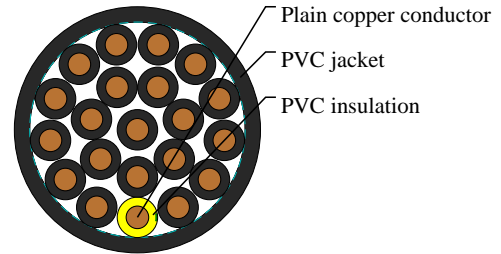

## APPLICATIONS

These cables are used for electricity supply in low voltage installation system, They are suitable for installation in indoors and outdoors, in cable ducts, underground, in power and switching stations, local energy distributions, industrial plants, where there is no risk of mechanical damage.

## STANDARDS

IEC 60502-1

## VOLTAGE RATING

600/1000V

## CABLE CONSTRUCTION

- Solid copper conductor, class 1 to NP 2363
- PVC insulation
- Flexible PVC outer jacket

## COLOUR CODE

Insulation Colour Code

Color coded to HD 308

21 cores - Green-Yellow + black numbered

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 3500 volts
- Flexing bending radius: 15 x Ø
- Static bending radius: 12 x Ø
- Flexing temperature: -5° C to +50° C
- Fixed installation temperature: - 40° C to +70° C
- Flame retardant: IEC 60332-1, EN 50265-2-1
- Insulation resistance: 100 MΩ x km

## DIMENSION AND PARAMETERS

| No. of Cores × Cross-sectional Area | Approx. Overall Diameter | Approx. Weight |
|-------------------------------------|--------------------------|----------------|
| No.×mm <sup>2</sup>                 | mm                       | kg/km          |



# Caledonian

Industrial Cables (Portuguese Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

|        |    |      |
|--------|----|------|
| 21x2.5 | 25 | 1030 |
|--------|----|------|